
ZNSHINESOLAR

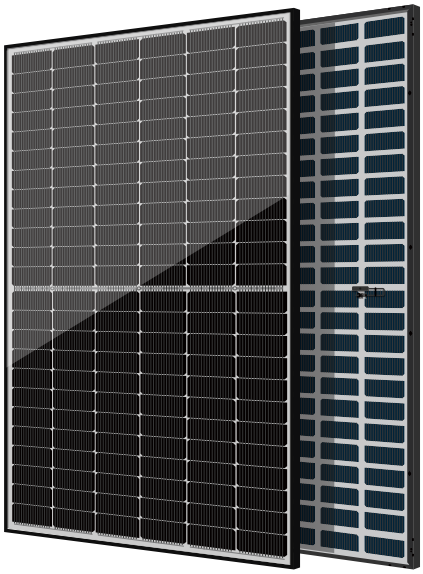

ZXN7-BD144 Series

SMBB HALF-CELL N-Type Bifacial Double Glass

Monocrystalline PU Composite Framed PV Module


575-605W
POWER RANGE

23.42%
MAXIMUM EFFICIENCY

0.40%
YEARLY DEGRADATION

12 12 YEARS PRODUCT WARRANTY

30 30 YEARS OUTPUT GUARANTEE

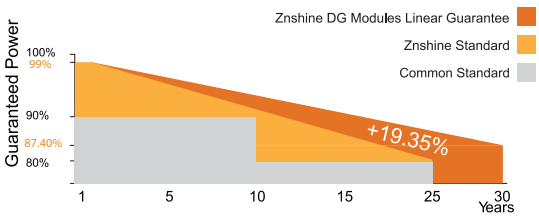

*Please check Limited Warranty for Standard PV Modules which is officially released by ZNSHINE PV-TECH Co.,Ltd.

IEC 61215/IEC 61730/IEC 61701/IEC 62716

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets,please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

Key Features

Ultra Low Carbon
CO_2 emissions only 10% of the AL frame.

Better Weak Illumination Response
More power output in weak light condition, such as haze, cloudy, and early morning.

High Insulation
PU composite frame: no grounding, reduce PID risk, improve safety, maintenance free.

Corrosion Resistant
Excellent humidity and heat resistance, anti-salt spray corrosion, suitable for offshore PV stations and other highly corrosive fields.

High Anti PID
PU composite frame, Super Anti-PID performance.

TIER 1
Global,Tier 1 bankable brand,with independently certified advanced automated manufacturing.

High Anti-Glare
PU composite frame, Super Anti-Glare performance.


Natural Black Vision
Solar modules with a PU composite frame have a more uniform appearance and superior aesthetics.

ZXN7-BD144 Series

SMBB HALF-CELL N-Type Bifacial Double Glass
Monocrystalline PU Composite Framed PV Module

ZNSHINESOLAR

DIMENSIONS OF PV MODULE(mm)

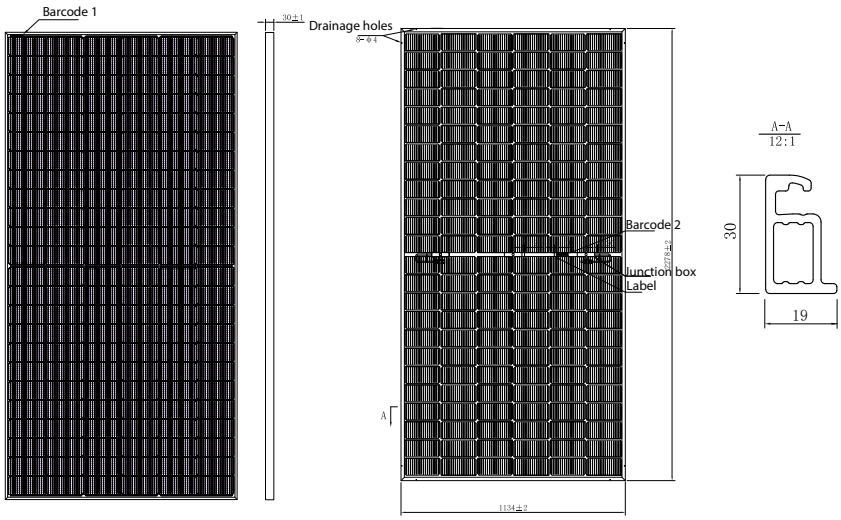


Front View


Back View

*Remark: customized frame color and cable length available upon request
only the classic 16BB assembly diagram is displayed here, other busbar can be customized according to requirements

I-V CURVES OF PV MODULE(605W)

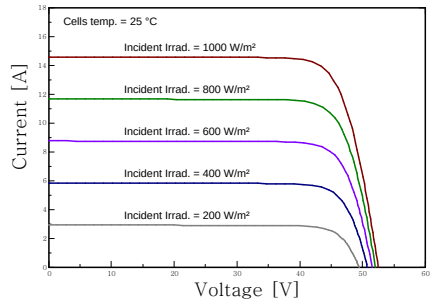

P-V CURVES OF PV MODULE(605W)

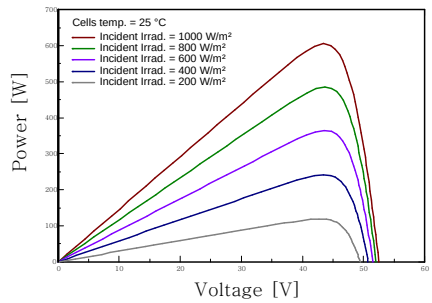

ELECTRICAL CHARACTERISTICS | STC*

Nominal Power Watt Pmax(W)*	575	580	585	590	595	600	605
Maximum Power Voltage Vmp(V)	42.60	42.80	43.00	43.20	43.40	43.60	43.80
Maximum Power Current Imp(A)	13.50	13.56	13.61	13.66	13.71	13.77	13.82
Open Circuit Voltage Voc(V)	51.30	51.50	51.70	51.90	52.10	52.30	52.50
Short Circuit Current Isc(A)	14.29	14.35	14.41	14.46	14.51	14.56	14.61
Module Efficiency (%)	22.26	22.45	22.65	22.84	23.03	23.23	23.42

*The data above is for reference only and the actual data is in accordance with the pratical testing
*STC (Standard Test Condition): Irradiance 1000W/m, Module Temperature 25±2℃, AM 1.5
*Measuring uncertainty: ±3%, Power tolerance: ±3%
*Electrical data in this catalog do not refer to a single module and they are not part of the offer.
*They only serve for comparison among different module types.
*All the electrical characteristics such as Im, Vm, Isc, Voc and FF are within ±5% tolerance.

MECHANICAL DATA

Solar cells	N-type Monocrystalline
Cells orientation	144 (6×24)
Module dimension	2278×1134×30 mm (With Frame)
Weight	32.0±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	IP 68, 3 diodes
Cables	4 mm² ,1200mm or Customized Length(with connectors)
Connectors	MC4 Compatible or MC4 EVO2

ELECTRICAL CHARACTERISTICS | NMOT*

Maximum Power Pmax(Wp)	433.90	437.80	441.40	447.10	450.80	454.60	458.30
Maximum Power Voltage Vmp(V)	40.00	40.20	40.40	40.40	40.60	40.80	41.00
Maximum Power Current Imp(A)	10.83	10.88	10.93	11.07	11.11	11.15	11.19
Open Circuit Voltage Voc(V)	48.40	48.60	48.80	49.00	49.20	49.40	49.60
Short Circuit Current Isc(A)	11.53	11.58	11.63	11.67	11.71	11.75	11.79

*NMOT:Irradiance 800W/m²,Ambient Temperature 20℃,AM 1.5,Wind Speed 1m/s

TEMPERATURE RATINGS

NMOT	44℃ ±2℃
Temperature coefficient of Pmax	(-0.30±0.03)%/℃
Temperature coefficient of Voc	-0.25%/℃
Temperature coefficient of Isc	0.046%/℃
Refer.Bifacial Factor	(80±10)%

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40℃~+85℃
Maximum series fuse	30 A
Front Side Maximum Static Loading	Up to 5400Pa
Rear Side Maximum Static Loading	Up to 2400Pa

*Remark:Do not connect Fuse in Combiner Box with two or more strings in parallel connection

ELECTRICAL CHARACTERISTICS (REAR POWER GAIN) *

5%	Maximum Power:Pmax(W)	604	609	614	620	625	630	635
	Module Efficiency(%)	23.37	23.57	23.78	23.98	24.18	24.39	24.59
15%	Maximum Power:Pmax(W)	661	667	673	679	684	690	696
	Module Efficiency(%)	25.60	25.82	26.04	26.27	26.49	26.71	26.93
25%	Maximum Power:Pmax(W)	719	725	731	738	744	750	756
	Module Efficiency(%)	27.82	28.07	28.31	28.55	28.79	29.03	29.28

PACKAGING CONFIGURATION *

Piece/Box	36
Piece/Container(40'HQ)	720

Note : Please carefully read the safety and installation instructions before using our PV modules. Specifications included in this datasheet are subject to change without notice. ZNSHINE reserves the right of final interpretation.

© ZNSHINE SOLAR | Edition: 20251127.E